



204 Technology Park Lane Fuquay-Varina, N.C. 27526 USA Tel: 919-557-7300 / Fax: 919-557-7110

Email: info@apexinst.com Web: www.apexinst.com



Basic-Plus Method 5 Part # SK-M5BP

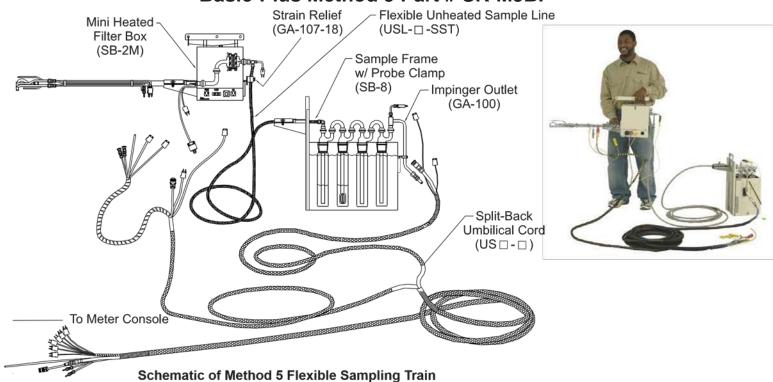

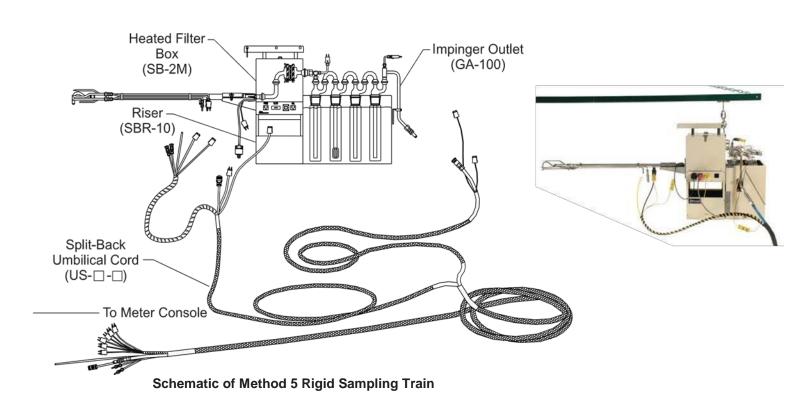



Apex Instruments, Inc. 204 Technology Park Lane Fuquay-Varina, N.C. 27526 USA Tel: 919-557-7300 / Fax: 919-557-7110

Email: info@apexinst.com Web: www.apexinst.com

SK-M5BP Includes:

Part #	Description			Qty.	Qty.
SB-2M	† 	Miniature Heated Filter Box, Model 50 (110V)		1	
SBR-10	10" Riser for SB-2M, Impinger Box Adapter			1	
SB-3	Impinger Box, Model 100, Holds 4 Impingers			1	
PS-6-H	Probe Sheath, 6 ft with Tube Heater, 120V			1	
PL-6S	Probe Liner, 6 ft, SS, 5/8" OD with #28 Grooved Ball			1	
PLN-6G	Probe Liner, Glass, 6 ft, 5/8" OD w/Unground #28 Grooved Ball			3	
US-30-10	U-Cord, Split, 30 ft, 1/4"QC, SS			1	
USL-15-SST	Unheated Sample Line, 15 ft, 3/8 TFE, SS with TC assembly			1	
SB-8	Sample Frame with Probe Clamp and Impinger Box Slides			1	
GA-107-12	Sample Line Adapter for SB-2M, includes Bracket and 1/" ID Sample Line Clamp			1	
GA-100	Sample Case Adapter with 1/2" SS Male QC			1	
NS-SET-S	Nozzle Set of 7, SS			1	
Includes:	NS-4	1/8" (~.125") SS Nozzle, 5/8" OD Shank w/Preswaged Ferrules	1		
	NS-6	3/16" (~.187") SS Nozzle, 5/8" OD Shank w/Preswaged Ferrules	1		
	NS-8	1/4" (~.250") SS Nozzle, 5/8" OD Shank w/Preswaged Ferrules	1		
	NS-10	5/16 (~.312") SS Nozzle, 5/8" OD Shank w/Preswaged Ferrules	1		
	NS-5	3/8" (~.375") SS Nozzle, 5/8" OD Shank w/Preswaged Ferrules	1		
	NS-7	7/16 (~.437") SS Nozzle, 5/8" OD Shank w/Preswaged Ferrules	1		
	NS-9	1/2" (~.500") SS Nozzle, 5/8" OD Shank w/Preswaged Ferrules	1		
	SH-NZ	Nozzle Case with Foam Lining (holds 7 nozzles)	1		
	N-10	Nut, 5/8 Tube, SS (One nut on #16 Nozzle)	3		
	O-014V	O-Ring, Viton, 1/2-14" UT, LG-SM	21		
GN-CGS	Basic Glassware Set			1	
Includes:	GN-1	Cyclone Bypass, Unground	1		
	GNFA-□	3" or 4" Filter Assembly Includes:	1		
	GN-□S	3 or 4" Filter Inlet, Unground #28 Socket	1		
	GA-□T	3 or 4" TFE Filter Disk with O-Rings	1		
	GN-□B	3 or 4" Filter Outlet, Unground #28 Ball	1		
	*GA-□CA	3 or 4" Filter Clamp, Open Style, Aluminum	1		
	GN-8-18K	Double L Adapter with Type K TC assembly, includes Cap and Silicone Seal	1		
	GN-9AO	Greenburg-Smith Impinger (with Orifice), Unground	1		
	GN-9A	Mod Greenburg-Smith Impinger (Plain), Unground	3		
	GN-11	U-Tube, Unground #28 Sockets	3		
	BS28WS	#28 Ball Joint Clamp (Generic)	12		
GF-3	Glass Fiber Filters, 3"			1	
PBC-6	6 ft Extendible Stainless Steel Probe Brush with PB-5/8A Nylon Brush			1	
NB-SET	Nozzle Brush Set (sizes 3, 5, & 8) in Carrying Tube.			1	
M5A-C	Casio CFX-97	750 Calculator, Pre-programmed with Method 5 Isokinetic Calculations		1	

Website: www.apexinst.com Contact: info@apexinst.com

Phone: (919) 557-7300 or (800) 882-3214

Doc#: Pack-SK-M5BP Publish Date: 4/13/2016 **Apex Instruments, Inc.** 204 Technology Park Lane Fuquay-Varina, NC 27526, U.S.A.